Kwikbolt™

HEAD TYPES:

Flat Protruding:

FP

Countersunk Protruding:

SP

Torx drive

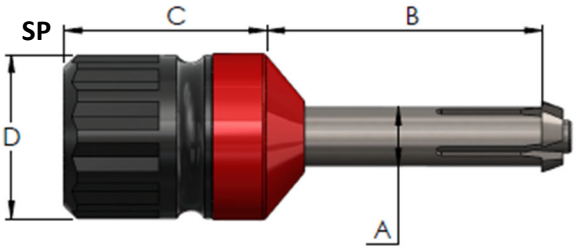

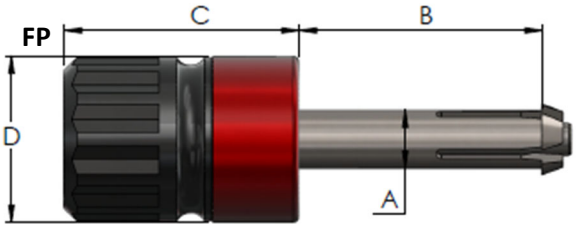

XX-0632A-XXX-XXX-ZTT3-MM **Kwikbolt Part Numbering**

- Head type, Torx drive with free spin leg feature
- Grip Range
- Nominal Hole Diameter
- Head Configuration: FP-Flat Protruding / SP-Countersunk Protruding

MM-Colour coding to customer specifications.

Other loads, tolerances and diameters available to customer requirements

Part Code	A nominal	B*	C min*	D min*	Grip Range*	Clamping Force Range	No of Cycles
	mm (inch)	mm (inch)	mm (inch)	mm (inch)	mm (inch) in 15 mm (0.591) steps	N (lbf)	
0332-T3	2.20 (0.086)	Standard grip range 15mm (0.591") on 30mm (1.181") head height. However grip range requested can change depending on customer project.	Standard head height 30mm (1.181") However larger 45mm(1.772") and smaller 19mm (0.748") head height avalable depending on customer project.	15.5 (0.610)	1mm (0.039) to 50mm (1.969)	222 (50) - 667 (150)	500
0432-T3	3.26 (0.128)			15.5 (0.610)	1mm (0.039) to 75mm (2.953)	222 (50) - 890 (200)	500
0532 -T3	3.96 (0.156)			15.5 (0.610)	1mm (0.039) to 75mm (2.953)	222 (50) - 1335 (300)	500
0632- T3	4.76 (0.188)			15.5 (0.610)	1mm (0.039) to 150mm (3.937)	222 (50) - 3,558 (800)	500
0832-T3	6.35 (0.250)			15.5 (0.610)	1mm (0.039) to 150mm (3.937)	222 (50) - 3,558 (800)	500
1032-T3	7.94 (0.313)			15.5 (0.610)	1mm (0.039) to 150mm (5.905)	222 (50) - 5,338 (1,200)	500
1232-T3	9.53 (0.375)			20.5 (0.808)	1mm (0.039) to 150mm (5.905)	222 (50) - 5,338 (1,200)	500
1432-T3	11.15 (0.438)			20.5 (0.808)	1mm (0.039) to 150mm (5.905)	222 (50) - 5,338 (1,200)	500
1632-T3	12.70 (0.500)			20.5 (0.808)	1mm (0.039) to 150mm (5.905)	445 (100) - 6,672 (1,500)	500
1832-T3	14.24 (0.563)			24.5 (0.965)	1mm (0.039) to 150mm (5.905)	445 (100) - 6,672 (1,500)	500
2032-T3	15.90 (0.625)			24.5 (0.965)	1mm (0.039) to 150mm (5.905)	445 (100) - 6,672 (1,500)	500
2432-T3	19.05 (0.750)			35.5 (1.398)	1mm (0.039) to 150mm (5.905)	445 (100) - 8,006 (1,800)	500
3232-T3	25.40 (1.000)			35.5 (1.398)	1mm (0.039) to 150mm (5.905)	445 (100) - 8,006 (1,800)	500

Head Types | FP = Flat Protruding | SP = Countersunk Protruding Grip Length Increments | 15mm (0.591")

* Varies depending on customer project.

E-mail: info@kwikbolt.com **web**:www.kwikbolt.com **Phone:**+44 (0) 23 8220 5775

© Kwikbolt Ltd All rights reserved. This Document is supplied by Kwikbolt Ltd on the express condition that it is treated as confidential. No use may be made thereof other than expressly authorised.

PATENTS: GB2455635, US8517650, EP2247862, GB2515314, US10060459, EP3011192, GB2529634, EP3186520, GB2540576, EP16745849.6, GB1613112.0, GB1716518.4
US15/441672, JP2017-530448, US15/746634, US16/320117, EP17758277.2, GB1617279.3, US16/379916, EP1794776.9, PCT/IB2018/056794, GB1914112.6